

ZyAIR G-100/G-110/G-200/G-300

802.11g Wireless CardBus Card/CardBus Card/ USB Adapter/PCI Adapter



ZyAIR G-100



ZyAIR G-110



EXT-105



ZyAIR G-200



ZyAIR G-300

B e n e f i t s

High Speed

ZyXEL's all-new wireless client adapters are compatible with IEEE802.11g standard, delivering a top speed of 54Mbps — five times faster than the current IEEE802.11b wireless network standard. With the ZyXEL 54Mbps wireless client adapters designed for laptops or desktops, you can enjoy Internet resources, access e-mails; and deliver large files, MP3 or videos with easy and safe high-speed wireless connection.

Maximum Freedom of Mobility

ZyXEL's client adapters provide you with the freedom of accessing the Internet anywhere, offering the maximum freedom of roaming while you are at home, in the office, or on hot spots such as airports, cafés, or hotels. With the compatibility with both 802.11b and 802.11g standard, the ZyXEL client adapters can interact with these networks wirelessly without limitation of physical ties.

Enhanced Wireless Security

In addition to the basic 64/128-bit WEP encryption, the ZyXEL wireless network adapters featured the latest, enhanced wireless security mechanisms of 802.1x authentication and Wi-Fi Protected Access (WPA) as well. These enhanced security measures allow only authorized users to access the network and thus further protect your data from being tapped during the wireless transmission.

Easy Installation and Operation

With the friendly setup Wizard, installation is quick and simple. The Plug-and-Play feature allows you to access a network wirelessly in virtually no time.

F e a t u r e s


- Data rate of up to 54Mbps, five times faster than 802.11b; good for delivering large files, MP3 and video media
- Works with both IEEE 802.11b and 802.11g (both at 2.4 GHz), and offers the freedom of mobility
- 64/128-bit WEP Encryption and WPA support ensure wireless data security
- Wi-Fi Certificate to ensure interoperability
- WHQL Certificate to ensure compatibility with Microsoft Windows
- Optional connector (AMX converting to R-SMA) for external-range extender antenna (ZyAIR G-110)

Feature Matrix

	ZyAIR G-100	ZyAIR G-110	ZyAIR G-200	ZyAIR G-300
Product Name	802.11g Wireless CardBus Card	802.11g Wireless CardBus Card	802.11g Wireless USB Adapter	802.11g Wireless PCI Adapter
Application	Laptop	Laptop	Laptop & Desktop	Desktop
Standard Compliance	IEEE 802.11g/b	IEEE 802.11g/b	IEEE 802.11g/b	IEEE 802.11g/b
Frequency Range	2.4G ~ 2.4835GHz	2.4G ~ 2.4835GHz	2.4G ~ 2.4835GHz	2.4G ~ 2.4835GHz
Data Rate	54Mbps/48Mbps/36Mbps/24Mbps/12Mbps/11Mbps/9Mbps/6Mbps/ 5.5Mbps/2Mbps/1Mbps (Automatic Fallback)			
Modulation Technique			DBPSK/DQPSK/CCK/OFDM	
Network Architecture			Ad-Hoc Mode (Peer to Peer without AP) & Infrastructure Mode	
Host Interface	32-bit CardBus	32-bit CardBus	USB2.0	PCI
Antenna	Internal patch antenna	Dual Diversity Antennas with one external antenna connector (work with ZyXEL EXT-105 or EXT-106)	Internal patch antenna	External Antenna with Reversed-SMA
Range Coverage	Indoor: 50m ~ 80m Outdoor: 150m ~ 400m	Indoor: 55M ~ 60-80m Outdoor : 150m ~ 300m	Indoor: 60m ~ 80m Outdoor: 150m ~ 300m	Indoor: 60m ~ 80m Outdoor: 150m ~ 300m
Security	64/128-bit WEP Encryption Wi-Fi Protected Access	64/128-bit WEP Encryption Wi-Fi Protected Access*	64/128-bit WEP Encryption Wi-Fi Protected Access	64/128-bit WEP Encryption Wi-Fi Protected Access
Roaming	IEEE 802.11 compliant	IEEE 802.11 compliant	IEEE 802.11 compliant	IEEE 802.11 compliant
Transmit Output Power	15dBm@11Mbps 11dBm@54Mbps	15dBm@11Mbps 12.5dBm@54Mbps	17dBm@11Mbps 13dBm@54Mbps	18dBm@11Mbps 15dBm@54Mbps
Receiver Sensibility	-83dBm@11Mbps -68dBm@54Mbps	-80dBm@11Mbps -66dBm@54Mbps	-88dBm@11Mbps -71dBm@54Mbps	-80dBm@11Mbps -65dBm@54Mbps

* For future release

Application Diagram

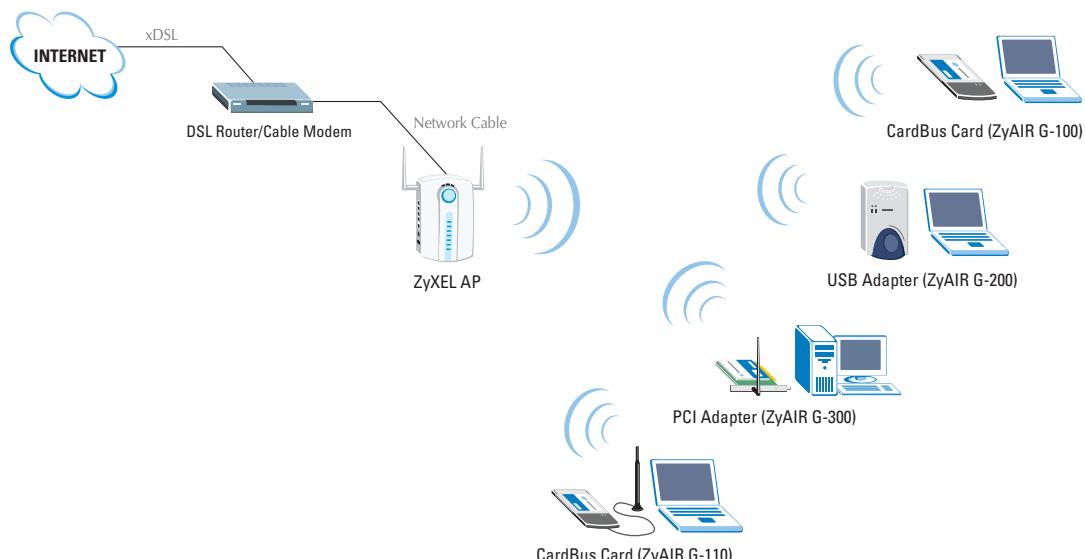

ZyXEL
Unleash Networking Power



This product is designed for the 2.4 GHz WLAN network throughout the EC region

Corporate Headquarters

ZyXEL Communications Corp.
Tel: +886-3-578-3942
Fax: +886-3-578-2439
Email: sales@zyxel.com.tw
http://www.zyxel.com.tw

Denmark

Tel: +45 39 55 07 00 Fax: +45 39 55 07 07
Email: sales@zyxel.dk
http://www.zyxel.dk

France

Tel: +33 (0)4 72 52 97 97 Fax: +33 (0)4 72 52 19 20
Email: info@zyxel.fr
http://www.zyxel.fr

North America

Tel: +1-714-632-0882 Fax: +1-714-632-0858
Email: sales@zyxel.com
http://www.zyxel.com

Spain

Tel: +34 902 195 420 Fax: +34 913 005 345
Email: sales@zyxel.es
http://www.zyxel.es

Finland

Tel: +358-9-4780 8400 Fax: +358-9-4780 8448
Email: sales@zyxel.fi
http://www.zyxel.fi

Germany

Tel: +49 2405 6909 0 Fax: +49 2405 6909 99
Email: sales@zyxel.de
http://www.zyxel.de

Norway

Tel: +47 22 80 61 80 Fax: +47 22 80 61 81
Email: sales@zyxel.no
http://www.zyxel.no

Sweden

Tel: +46 31 744 7700 Fax: +46 31 744 7701
Email: sales@zyxel.se
http://www.zyxel.se